

# PRODUCT SPECIFICATION

## SAFETYWARE Line Pro Class 4 Electrical Rubber Insulating Gloves

- Made with specially treated natural rubber latex compounds that offers superior dielectric properties.
- The superior anatomical construction of these gloves significantly reduces hand fatigue, allowing for extended wear without discomfort.
- The ergonomic design ensures a natural fit, enhancing overall hand dexterity and movement.
- Highly flexible, providing excellent comfort during long durations of use.
- Packed in opaque UV resistant bags and individual boxes for product protection.
- Certified for resistance to :
  - Category R – Resistance to Acid, Oil and O-Zone
  - Category C – Resistance to Very Low Temperature

### TECHNICAL DATA

MATERIAL	Rubber Latex Compound
COLOUR	Red
CLASS TYPE	Class 4
SIZE	8 - 11
CUFF PROFILE	Straight
LENGTH	410 ± 15 mm
THICKNESS (mm)	3.56 mm
PROOF TEST VOLTAGE AC (V)	40,000
MAX USE VOLTAGE AC (V)	36,000
WITHSTAND TEST VOLTAGE AC (V)	50,000 (EN 60903)
MINIMUM BREAKDOWN VOLTAGE AC (V)	50,000 (ASTM D120)
ARC FLESH PROTECTION CLASS	APC 2
STANDARD	EN 60903:2003 EN61482-1-2 ASTM D120 PPE Regulation (EU) 2016/425
SHELF LIFE	1 Year
PACKAGING	12 pairs / carton

Item Code: VLT-C4




### APPLICATIONS

- Power companies (Utilities)
- Electrical workshops Installation
- Maintenance and repairs involving high voltage equipment
- Telecommunications and Transportation Industries

### SIZING CHART

SIZE	CUFF WIDTH (± 15 mm)	PALM WIDTH (± 15 mm)
8	379	206
9	392	227
10	396	251
11	405	282

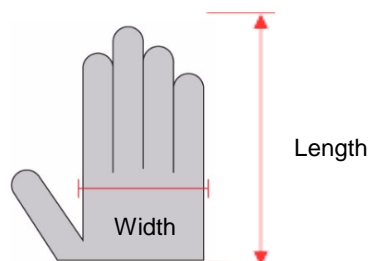

**SAFETYWARE SDN. BHD.** (632971-X)

Plot 237, Lengkok Perindustrian Bukit Minyak 3,  
Bukit Minyak Industrial Estate,  
14100 Simpang Ampat, Penang, Malaysia

Tel : +604-5023 882 | Fax : +604-5081 882  
www.safetyware.com | info@safetyware.com

It is the product users' responsibility to conduct all the appropriate evaluations & testing to determine the suitability of SAFETYWARE products for use in a particular environment or purpose. SAFETYWARE disclaims all warranties other than as expressly provided.

Date created: 04/12/2024  
Revision: 00